Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

FAIRCHILD SEMICONDUCTOR®

Jameco Part Number 94908

1N/FDLL 914/A/B / 916/A/B / 4148 / 4448

DO-35

LL-34

THE PLACEMENT OF THE EXPANSION GAP HAS NO RELATIONSHIP TO THE LOCATION OF THE CATHODE TERMINAL

COLOR BAND MARKING

DEVICE	1ST BAND	2ND BAND
FDLL914	BLACK	BROWN
FDLL914A	BLACK	GRAY
FDLL914B	BROWN	BLACK
FDLL916	BLACK	RED
FDLL916A	BLACK	WHITE
FDLL916B	BROWN	BROWN
FDLL4148	BLACK	BROWN
FDLL4448	BROWN	BLACK

Small Signal Diode

Absolute Maximum Ratings*

T_A = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{RRM}	Maximum Repetitive Reverse Voltage	100	V
$I_{F(AV)}$	Average Rectified Forward Current	200	mA
I_{FSM}	Non-repetitive Peak Forward Surge Current Pulse Width = 1.0 second Pulse Width = 1.0 microsecond	 1.0 4.0	 A A
T_{stg}	Storage Temperature Range	-65 to +200	°C
T_J	Operating Junction Temperature	175	°C

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:
1) These ratings are based on a maximum junction temperature of 200 degrees C.
2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

Symbol	Characteristic	Max	Units
		1N/FDLL 914/A/B / 4148 / 4448	
P_D	Power Dissipation	500	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	300	°C/W

©2002 Fairchild Semiconductor Corporation

Small Signal Diode
(continued)

Electrical Characteristics
T_A = 25°C unless otherwise noted

Symbol	Parameter		Test Conditions	Min	Max	Units
V_R	Breakdown Voltage		I_R = 100 µA	100		V
			I_R = 5.0 µA	75		V
V_F	Forward Voltage	**1N914B/4448**	I_F = 5.0 mA	620	720	mV
		1N916B	I_F = 5.0 mA	630	730	mV
		1N914/916/4148	I_F = 10 mA		1.0	V
		1N914A/916A	I_F = 20 mA		1.0	V
		1N916B	I_F = 20 mA		1.0	V
		1N914B/4448	I_F = 100 mA		1.0	V
I_R	Reverse Current		V_R = 20 V		25	nA
			V_R = 20 V, T_A = 150°C		50	µA
			V_R = 75 V		5.0	µA
C_T	Total Capacitance					
		1N916A/B/4448	V_R = 0, f = 1.0 MHz		2.0	pF
		1N914A/B/4148	V_R = 0, f = 1.0 MHz		4.0	pF
t_{rr}	Reverse Recovery Time		I_F = 10 mA, V_R = 6.0 V (60mA), I_{rr} = 1.0 mA, R_L = 100Ω		4.0	ns

Typical Characteristics

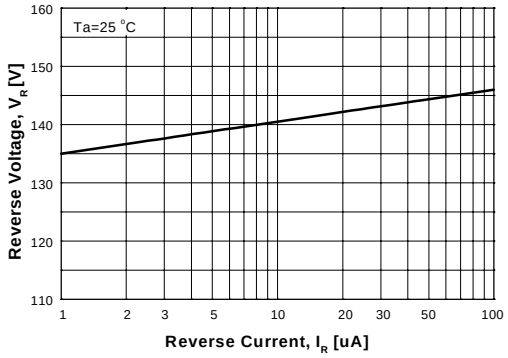

Figure 1. Reverse Voltage vs Reverse Current
BV - 1.0 to 100 uA

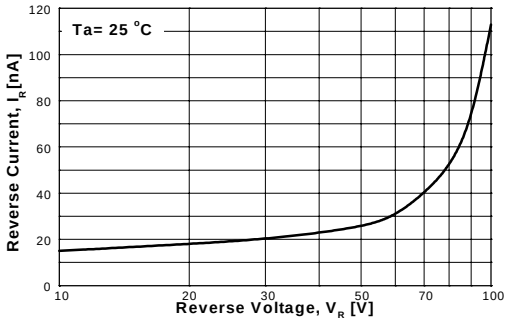

GENERAL RULE: The Reverse Current of a diode will approximately double for every ten (10) Degree C increase in Temperature

Figure 2. Reverse Current vs Reverse Voltage
IR - 10 to 100 V

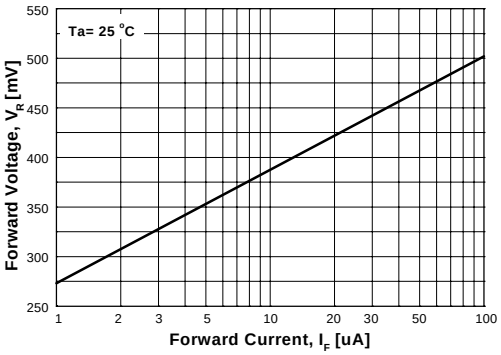

Figure 3. Forward Voltage vs Forward Current
VF - 1 to 100 uA

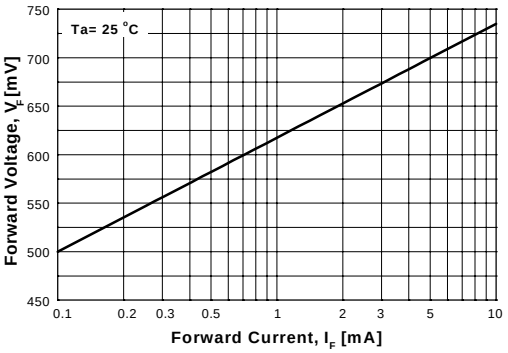

Figure 4. Forward Voltage vs Forward Current
VF - 0.1 to 10 mA

Typical Characteristics (continued)

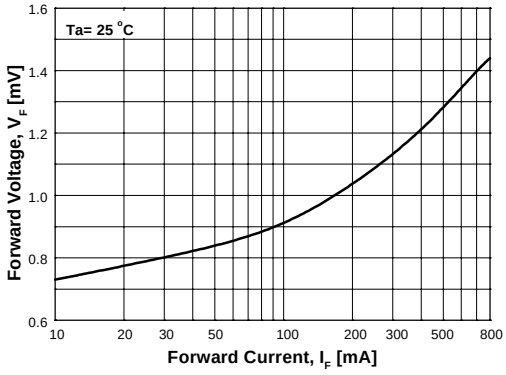

Figure 5. Forward Voltage vs Forward Current VF - 10 to 800 mA

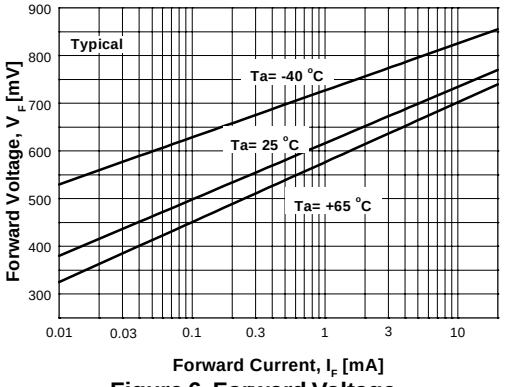

Figure 6. Forward Voltage vs Ambient Temperature VF - 0.01 - 20 mA (-40 to +65 Deg C)

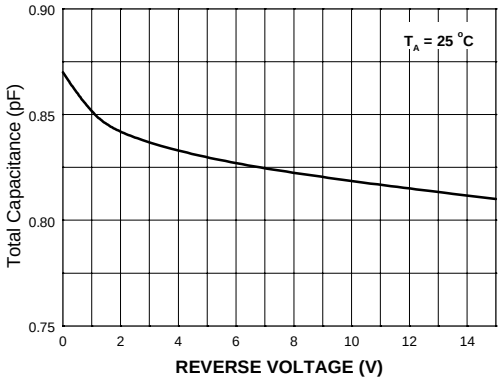

Figure 7. Total Capacitance

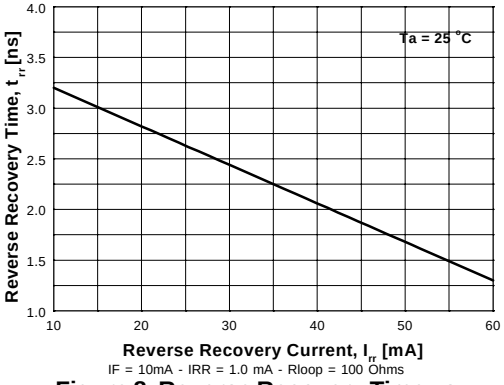

Figure 8. Reverse Recovery Time vs Reverse Recovery Current

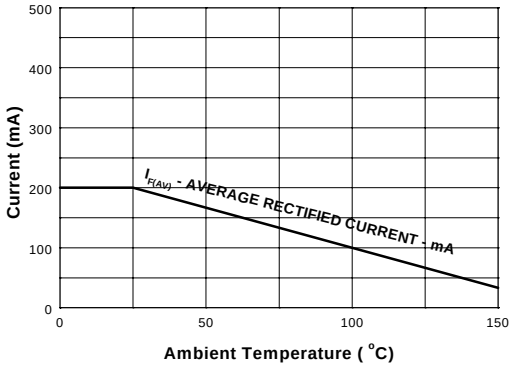

Figure 9. Average Rectified Current ($I_{F(AV)}$) versus Ambient Temperature (T_A)

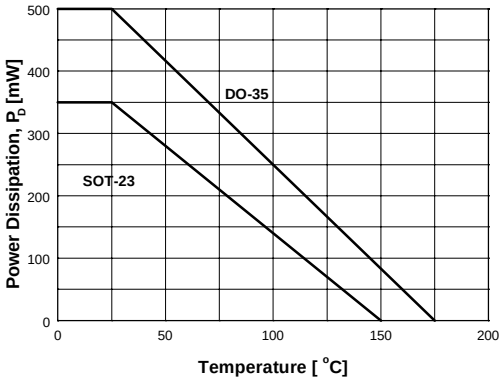

Figure 10. Power Derating Curve

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST ®	MICROWIRE™	SILENT SWITCHER ®	UHC™
Bottomless™	FASTr™	OPTOLOGIC ®	SMART START™	UltraFET ®
CoolFET™	FRFET™	OPTOPLANAR™	SPM™	VCX™
CROSSVOLT™	GlobalOptoisolator™	PACMAN™	STAR*POWER™	
DenseTrench™	GTO™	POP™	Stealth™	
DOME™	HiSeC™	Power247™	SuperSOT™-3	
EcoSPARK™	I^2C™	PowerTrench ®	SuperSOT™-6	
E^2CMOS^{TM}	ISOPLANAR™	QFET™	SuperSOT™-8	
$EnSigna^{TM}$	LittleFET™	QS™	SyncFET™	
FACT™	MicroFET™	QT Optoelectronics™	TinyLogic™	
FACT Quiet Series™	MicroPak™	Quiet Series™	TruTranslation™	

STAR*POWER is used under license

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.
As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.